



## Bevolo Gas & Electric Lights Wind Guard Installation Instructions

Bevolo's Wind Guard is a compact design that is user friendly and easy to install with minimal effort and tools. Each Bevolo Wind Guard kit requires only minutes to install.


Recommended tools: (2) 7/16" open end wrenches.

**Please note: Pipe joint compound MUST be used when assembling all threaded pieces.**

Step 1: Turn gas valve to off position to extinguish flame and allow burner assembly to cool before handling. Using a 7/16" wrench remove gas tip while using second 7/16" wrench to keep gas jet assembly from moving.

Step 2: Screw the recently removed gas tip into brass coupler supplied with Wind Guard kit. After tip is finger tight, use 7/16" wrench to tighten the rest of the way.

Step 3: Screw Wind Guard assembly into gas jet assembly using the supplied gaskets and washers. \*See attached drawing for proper assembly order. Make sure slit in gas tip is aligned parallel to front of gas fixture.

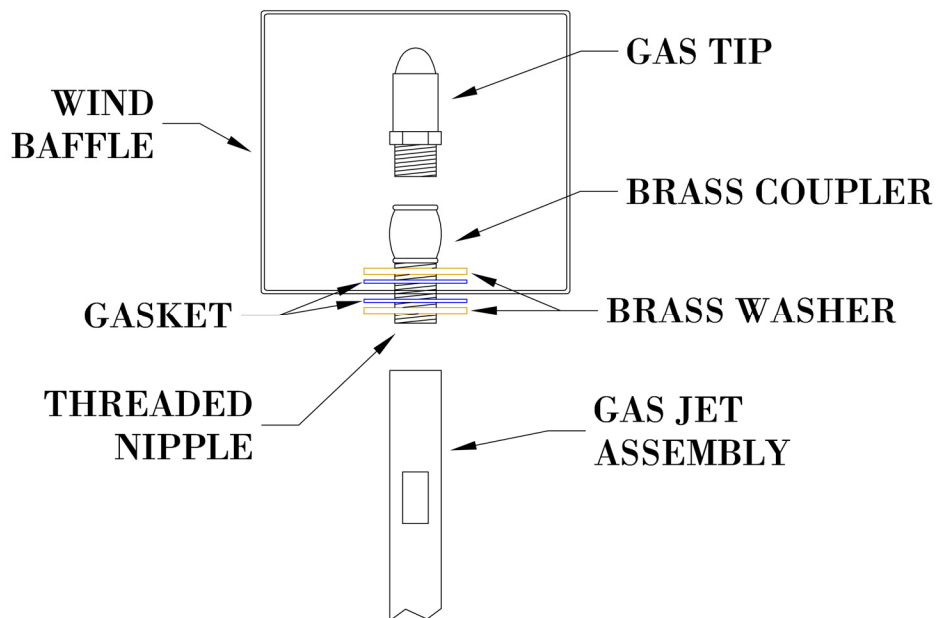

Step 4: Return gas valve to open position and relight burner. Bevolo recommends flame height to be 1" - 1 1/2" for smaller fixtures.