



Electric Fixture Installation Notes

FOR YOUR SAFETY - FIRE / SHOCK HAZARD

1. Risk of fire or electrical shock. Electric products should ONLY be installed by a qualified, licensed electrician or installer.
2. Installation must conform with all local codes or, in the absence of local codes, to the standard for Incandescent Lighting Fixtures ANSI/UL 1598.
3. To reduce risk of fire 100-watts per fixture or less is recommended.
4. For standard and raised socket applications, use Medium base (E26) bulbs. For candelabra applications, use Candelabra base (E12) bulbs.

Note: Bevolo recommends 60-watt equivalent and warm white for most applications.

Bulb shape is personal preferences.

WARNING: Failure to follow these instructions could result in fire or electric shock, which could cause property damage, personal injury or death.

For **maintenance** and additional instructions please scan the QR code or visit:

Bevolo.com/instructions



INTERTEK.COM/MARKS/ETL
#3097503 #3041856 #9700712



**Installers: Please leave this sheet with the homeowner.*

INSTALLATION INSTRUCTIONS **FOR HALF AND FULL RODIN BRACKET** **ELECTRIC FIXTURES**

NOTE: Installations must always conform to local and national codes. Contact Bevolo technical support with any questions.



NOTE: Two people are required to safely install this fixture.

*See installation drawing for reference.

1. Bracket may be located under foam packing material.
2. Removal of some glass panels from the fixture may be necessary to better access mounting holes.
3. Test fit location where fixture/bracket will be installed, confirm level in two directions, mark and drill holes, ensure there is suitable material and support for a secure installation.
4. Attach bracket to fixture as shown in details 'A' and 'B'.
5. Route wiring through supplied brass conduit and properly connect fixture wiring to electrical source and ground.
6. Secure bracket to wall using proper mounting hardware (supplied by others.) **Note:** Installers must determine and provide appropriate hardware for the specific mounting surface and environment.
7. Level fixture and tighten brass screw and nut (see Detail 'B')
8. Carefully replace any glass panes which were removed and press firmly down on copper tabs to ensure glass is flush against copper legs.

FOR COMPLETE INSTALLATION INSTRUCTIONS AND SAFETY WARNINGS, REFERENCE THE YELLOW "ELECTRIC INSTALLATION AND USER GUIDE" INCLUDED WITH YOUR FIXTURE OR VISIT:


BEVOLO.COM/INSTRUCTIONS

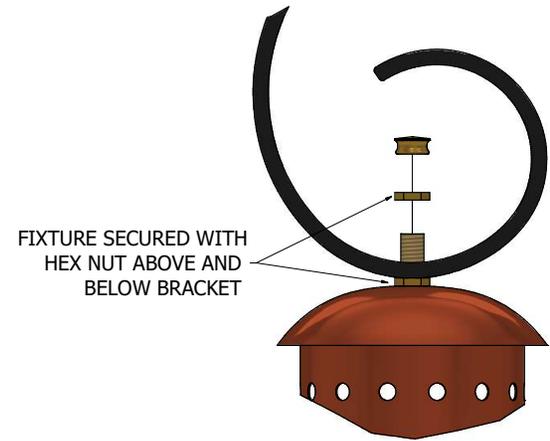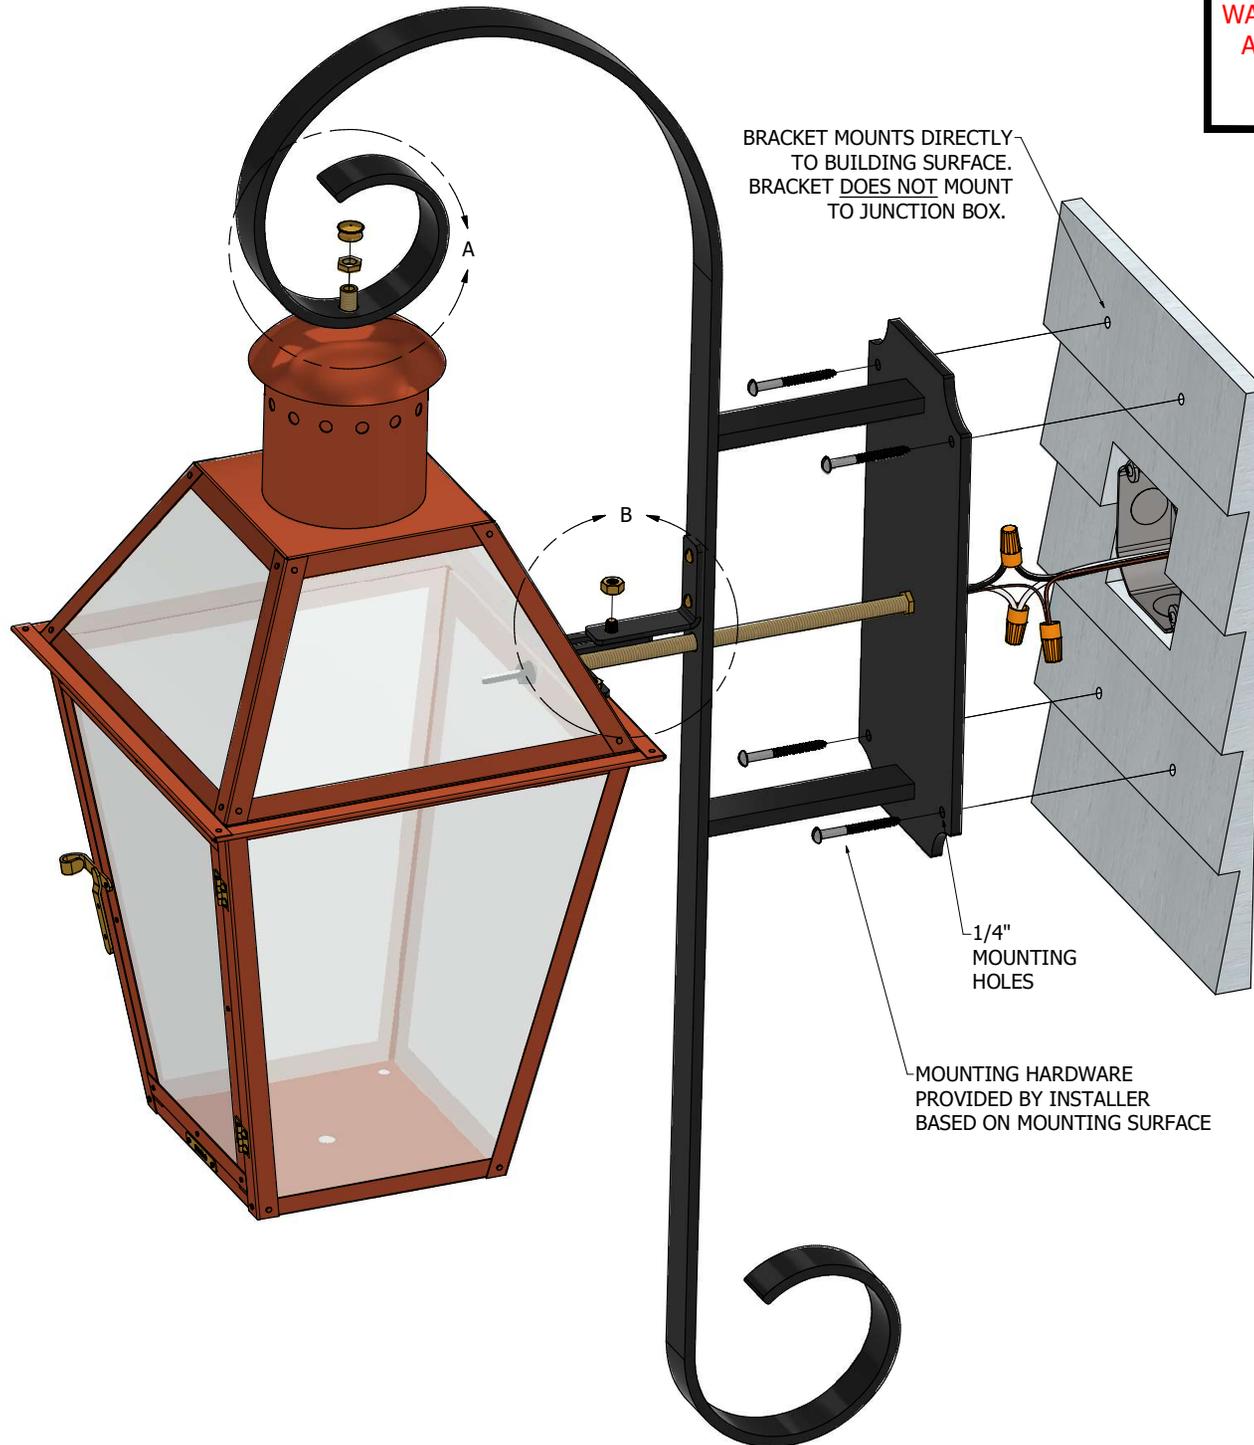

DETAIL A

FIXTURE TO BRACKET ATTACHMENT

ADJUST FIXTURE TO LEVEL POSITION. THEN TIGHTEN SCREW AND NUT.

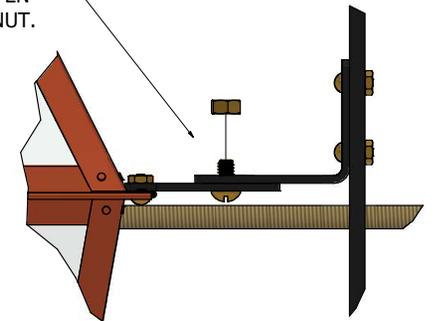

DETAIL B

LEVEL ADJUSTMENT

BEVOLO GAS & ELECTRIC LIGHTS

RODIN INSTALLATION - ELECTRIC

COPYRIGHT 2023, BEVOLO GAS & ELECTRIC LIGHTS. THIS DRAWING AND ANY DESIGN OR DATA CONTAINED THEREIN ARE CONSIDERED PROPERTY OF BEVOLO GAS AND ELECTRIC LIGHTS. NEITHER THE DRAWING NOR ITS CONTENT MAY BE COPIED, REPRODUCED, OR EDITED TO A LIKENESS WITHOUT THE WRITTEN CONSENT OF BEVOLO GAS AND ELECTRIC LIGHTS.