



Electric Fixture Installation Notes

FOR YOUR SAFETY - FIRE / SHOCK HAZARD

1. Risk of fire or electrical shock. Electric products should ONLY be installed by a qualified, licensed electrician or installer.
2. Installation must conform with all local codes or, in the absence of local codes, to the standard for Incandescent Lighting Fixtures ANSI/UL 1598.
3. To reduce risk of fire 100-watts per fixture or less is recommended.
4. For standard and raised socket applications, use Medium base (E26) bulbs. For candelabra applications, use Candelabra base (E12) bulbs.

Note: Bevolo recommends 60-watt equivalent and warm white for most applications.

Bulb shape is personal preferences.

WARNING: Failure to follow these instructions could result in fire or electric shock, which could cause property damage, personal injury or death.

For **maintenance** and additional instructions please scan the QR code or visit:

Bevolo.com/instructions



INTERTEK.COM/MARKS/ETL
#3097503 #3041856 #9700712



**Installers: Please leave this sheet with the homeowner.*

INSTALLATION INSTRUCTIONS **FOR COLUMN MOUNT ELECTRIC FIXTURES**

NOTE: *Installations must always conform to local and national codes. Contact Bevolo technical support with any questions.*


NOTE: *Two people are required to safely install this fixture.*

*See installation drawing for reference.

1. Removal of some glass panels from the fixture may be necessary for access to mounting hardware and for ease of installation.
2. With column mount adapter attached to the main bracket, properly connect fixture wiring to electrical source and ground.
3. Remove the column mount adapter from the main bracket and mount to column surface using proper mounting hardware (supplied by others.) Note: Installers must determine and provide appropriate hardware for the specific mounting surface and environment.
4. Fit the main bracket and fixture over the column mount adapter and secure by tightening the (3) set screws.
5. Carefully replace any glass panes which were removed and press firmly down on copper tabs to ensure glass is flush against copper legs.

FOR COMPLETE INSTALLATION INSTRUCTIONS AND SAFETY WARNINGS, REFERENCE THE YELLOW "ELECTRIC INSTALLATION AND USER GUIDE" INCLUDED WITH YOUR FIXTURE OR VISIT:

BEVOLO.COM/INSTRUCTIONS

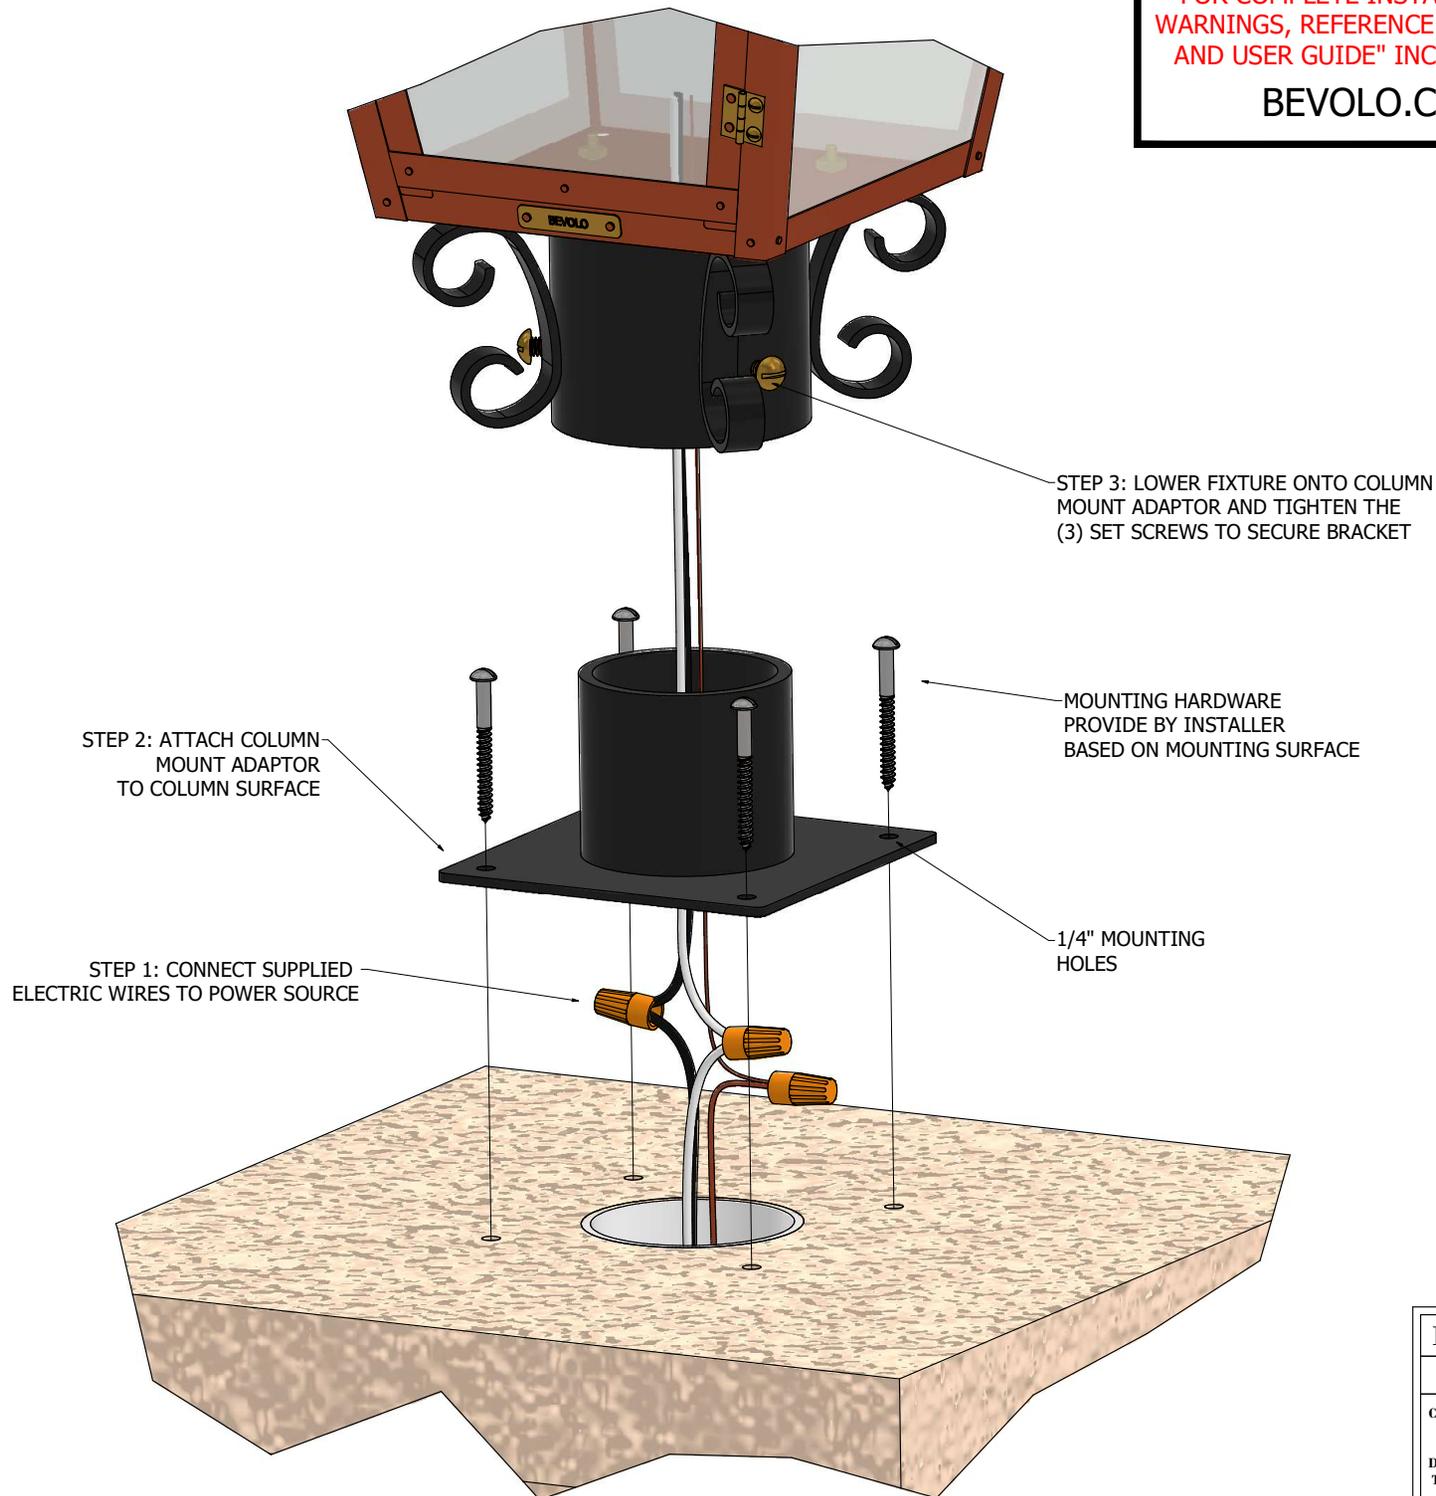

BEVOLO GAS & ELECTRIC LIGHTS

COLUMN MOUNT INSTALLATION - ELECTRIC

COPYRIGHT 2023, BEVOLO GAS & ELECTRIC LIGHTS. THIS DRAWING AND ANY DESIGN OR DATA CONTAINED THEREIN ARE CONSIDERED PROPERTY OF BEVOLO GAS AND ELECTRIC LIGHTS. NEITHER THE DRAWING NOR ITS CONTENT MAY BE COPIED, REPRODUCED, OR EDITED TO A LIKENESS WITHOUT THE WRITTEN CONSENT OF BEVOLO GAS AND ELECTRIC LIGHTS.