

## **Electric Fixture Installation Notes**

### **FOR YOUR SAFETY - FIRE / SHOCK HAZARD**

1. Risk of fire or electrical shock. Electric products should ONLY be installed by a qualified, licensed electrician or installer.
2. Installation must conform with all local codes or, in the absence of local codes, to the standard for Incandescent Lighting Fixtures ANSI/UL 1598.
3. To reduce risk of fire 100-watts per fixture or less is recommended.
4. For standard and raised socket applications, use Medium base (E26) bulbs. For candelabra applications, use Candelabra base (E12) bulbs.

*Note: Bevolo recommends 60-watt equivalent and warm white for most applications.*

*Bulb shape is personal preferences.*

**WARNING: Failure to follow these instructions could result in fire or electric shock, which could cause property damage, personal injury or death.**

For **maintenance** and additional instructions please scan the QR code or visit:

**Bevolo.com/instructions**



**INTERTEK.COM/MARKS/ETL**  
**#3097503 #3041856 #9700712**



*\*Installers: Please leave this sheet with the homeowner.*



### **INSTALLATION INSTRUCTIONS** **FOR HANGING CHAIN ELECTRIC FIXTURES**

**NOTE:** *Installations must always conform to local and national codes. Contact Bevolo technical support with any questions.*



**NOTE:** *Two people are required to safely install this fixture.*

*\*See installation drawing for reference.*

1. Ensure the junction box provides adequate support for secure installation.
2. Attach crossbar to junction box with hardware included with junction box (supplied by others.)
3. Screw threaded rod into crossbar and secure with lock washer and hex nut.
4. With chain removed, thread screw collar loop onto threaded rod and place canopy flush to ceiling. Secure canopy by attaching the seating ring onto screw collar loop. NOTE: This step is to ensure everything will line up properly during final installation. If adjustment is needed, return to step 3 and adjust threaded rod to achieve the correct height.
5. Attach chain to screw collar loop.
6. Drop the seating ring and canopy down the chain.
7. Properly connect fixture wiring to electrical source and ground. The ground wire should also be attached to ground screw on crossbar.
8. Lift canopy back into place and secure with seating ring.

FOR COMPLETE INSTALLATION INSTRUCTIONS AND SAFETY WARNINGS, REFERENCE THE YELLOW "ELECTRIC INSTALLATION AND USER GUIDE" INCLUDED WITH YOUR FIXTURE OR VISIT:

[BEVOLO.COM/INSTRUCTIONS](http://BEVOLO.COM/INSTRUCTIONS)

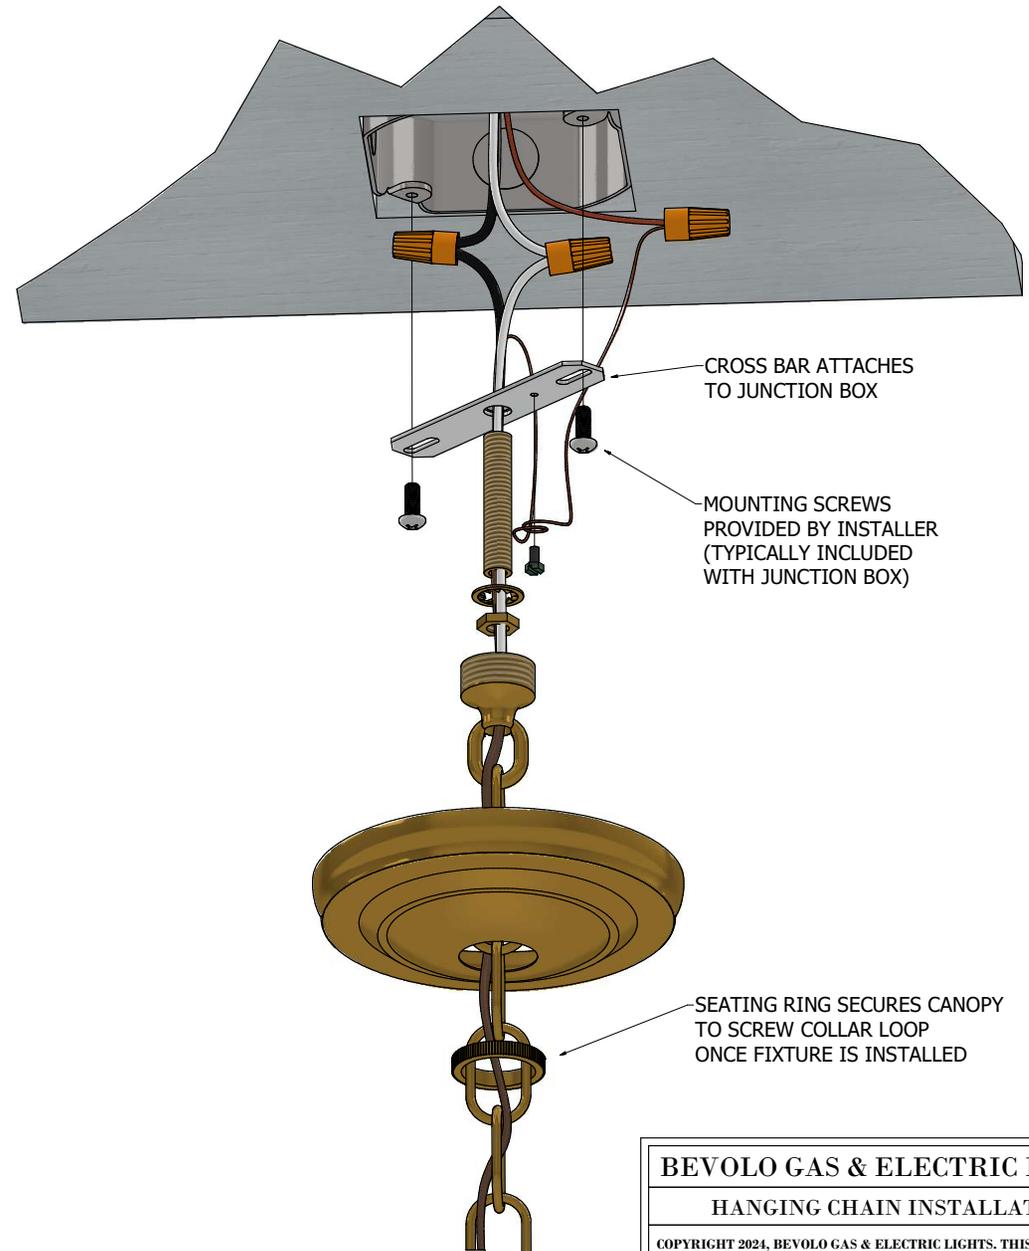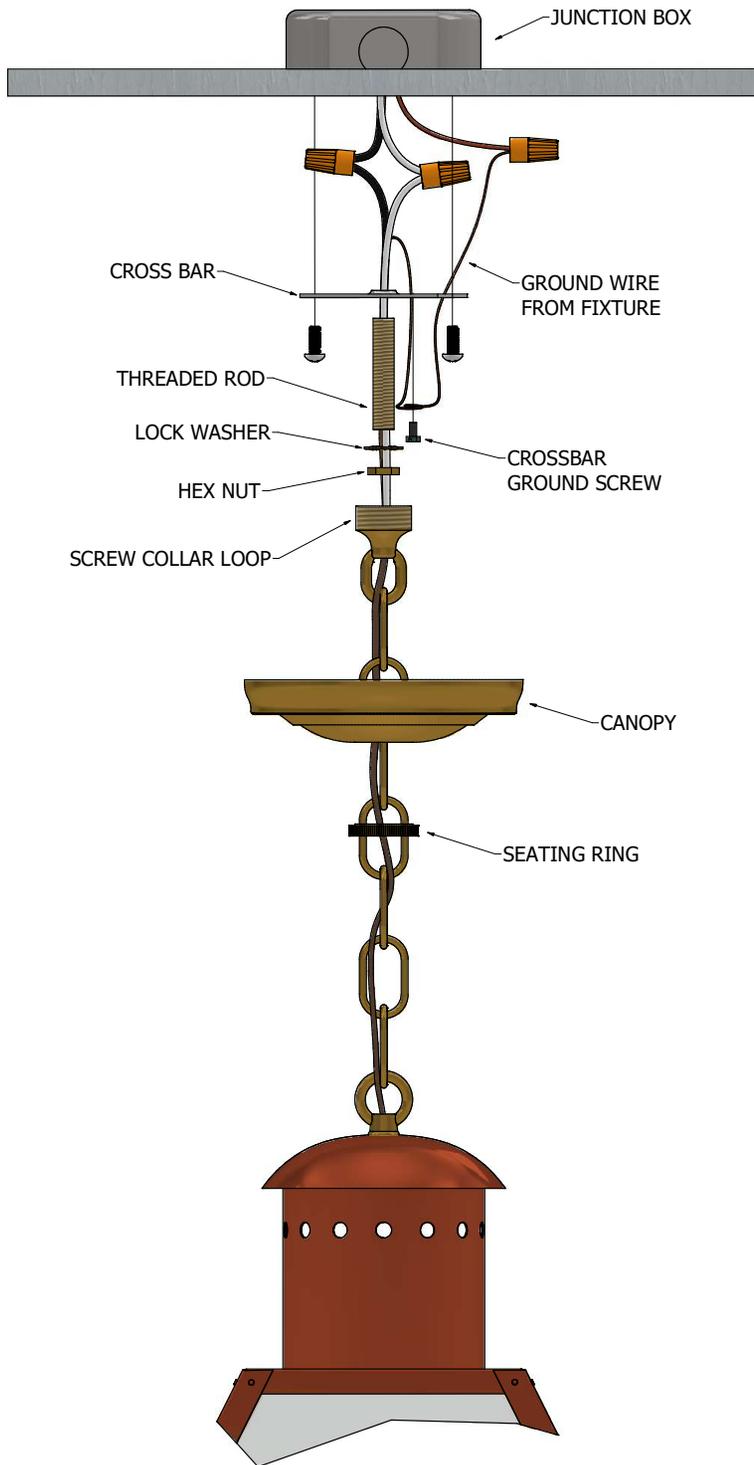

INSTALLATION DETAIL

**BEVOLO GAS & ELECTRIC LIGHTS**

**HANGING CHAIN INSTALLATION**

COPYRIGHT 2024, BEVOLO GAS & ELECTRIC LIGHTS. THIS DRAWING AND ANY DESIGN OR DATA CONTAINED THEREIN ARE CONSIDERED PROPERTY OF BEVOLO GAS AND ELECTRIC LIGHTS. NEITHER THE DRAWING NOR ITS CONTENT MAY BE COPIED, REPRODUCED, OR EDITED TO A LIKENESS WITHOUT THE WRITTEN CONSENT OF BEVOLO GAS AND ELECTRIC LIGHTS.