

## Gas Fixture General Installation Notes:

1. Gas fixtures are designed for outdoor installation only, unless equipped with our Automatic Safety Shut-Off System w/ Flame Sensor.
2. Installers must determine and provide appropriate hardware for the specific mounting surface and environment.
3. Fixtures must be installed at least 3" from combustible walls and 12" from combustible ceilings.
4. Although fixtures are equipped with a control valve, it is recommended that an additional shut-off valve (supplied by others) is installed upstream of fixture, and may be required by local code.
5. Make sure all gas lines have been fully bled before attaching the gas line to fixture.
6. For use with propane, contact your gas supplier for an appropriate low-pressure regulator.

## Gas Fixture Specifications:

- **Natural Gas**
  - BTU Rating: 800-1200 BTU per hour
  - Minimum Working Pressure: 2" WC or 0.07 PSI
  - Recommended Working Pressure: 7" WC or 0.25 PSI
  - **Maximum Working/Test Pressure: 13.7" WC or 0.5 PSI**
- **Propane Gas (LPG)**
  - BTU Rating: 1200-1500 BTU per hour
  - Minimum Working Pressure: 2" WC or 0.07 PSI
  - Recommended Working Pressure: 11" WC or 0.4 PSI
  - **Maximum Working/Test Pressure: 13.7" WC or 0.5 PSI**

For **maintenance** and additional instructions please scan the QR code or visit:

**Bevolo.com/instructions**



**INTERTEK.COM/MARKS/ETL**  
**#3097503 #3041856 #9700712**



*\*Installers: Please leave this sheet with the homeowner.*



## INSTALLATION INSTRUCTIONS FOR COLUMN MOUNT GAS FIXTURES

**NOTE:** *Installations must always conform to local and national codes. Contact Bevolo technical support with any questions.*

**NOTE:** *Two people are required to safely install this fixture.*

*\*See installation drawing for reference.*

1. Test fit location where fixture/bracket will be installed, confirm level, mark and drill holes, and ensure there is suitable material and support for a secure installation.
2. To avoid kinking the gas line, coil gas line at top of column. See Note and 'Installation Tip' on drawing.
3. Secure column mount adaptor to column surface using proper mounting hardware (supplied by others.) See Step 1 on drawing.
4. Orient fixture with door facing primary approach.
5. Attach the supplied 1/4" compression fitting attached to gas jet to 1/4" copper tubing at gas supply. See Step 2 on drawing.
6. Lower fixture onto column mount adaptor while tucking coiled gas line into column cavity and tighten the (3) set screws to secure the bracket. See Step 3 on drawing.
7. Run the necessary LOW-pressure test for leaks. **Note:** Gas fixtures must be either disconnected from the gas supply or isolated by closing upstream shutoff valve during any pressure test of the system at test pressures more than 1/2 psi. Pressures exceeding 1/2 psi may damage valve assembly.
8. **Lighting the fixture:** With lighter/flame just above the porcelain burner tip, turn brass valve counterclockwise approximately 1/8 turn until flame appears. Adjust flame to recommended height: (1" to 1.5" for 21" and smaller fixtures 1.5" to 2" for fixtures larger than 21".) **Note: Do not operate fixture with gas valve fully open or flame height greater than 3". This may result in damage to your fixture due to excessive heat.**

FOR COMPLETE INSTALLATION INSTRUCTIONS AND SAFETY WARNINGS, REFERENCE THE GREEN "GAS INSTALLATION AND USER GUIDE" INCLUDED WITH YOUR FIXTURE OR VISIT:

[BEVOLO.COM/INSTRUCTIONS](http://BEVOLO.COM/INSTRUCTIONS)



MOUNTING HARDWARE PROVIDED BY INSTALLER BASED ON MOUNTING SURFACE


STEP 1: ATTACH COLUMN MOUNT ADAPTOR TO COLUMN SURFACE

STEP 3: LOWER FIXTURE ONTO COLUMN MOUNT ADAPTOR AND TIGHTEN THE (3) SET SCREWS TO SECURE BRACKET

1/4" MOUNTING HOLES

STEP 2: CONNECT 1/4" GAS LINE (PROVIDED BY INSTALLER) TO 1/4" COMPRESSION FITTING (INCLUDED WITH FIXTURE)

NOTE: A CAVITY IN COLUMN IS REQUIRED TO HOUSE COILED GAS LINE\*

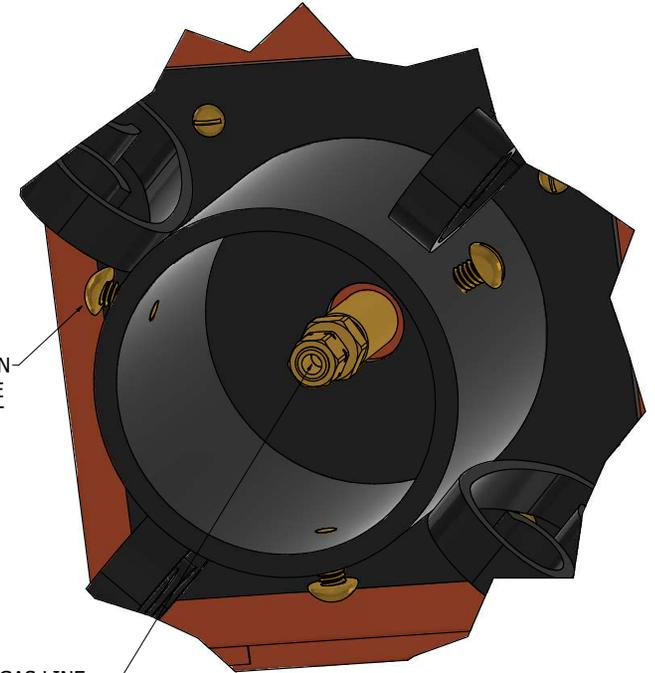

DETAIL A  
UNDERSIDE OF FIXTURE

\*INSTALLATION TIP: TO AVOID KINKING THE GAS LINE DURING INSTALLATION, COIL THE 1/4" LINE SO IT CAN BE RAISED/LOWERED INTO THE COLUMN AS REQUIRED

BEVOLO GAS & ELECTRIC LIGHTS

COLUMN MOUNT INSTALLATION - GAS

COPYRIGHT 2023, BEVOLO GAS & ELECTRIC LIGHTS. THIS DRAWING AND ANY DESIGN OR DATA CONTAINED THEREIN ARE CONSIDERED PROPERTY OF BEVOLO GAS AND ELECTRIC LIGHTS. NEITHER THE DRAWING NOR ITS CONTENT MAY BE COPIED, REPRODUCED, OR EDITED TO A LIKENESS WITHOUT THE WRITTEN CONSENT OF BEVOLO GAS AND ELECTRIC LIGHTS.